




Attach plastic feet to all 4 uprights

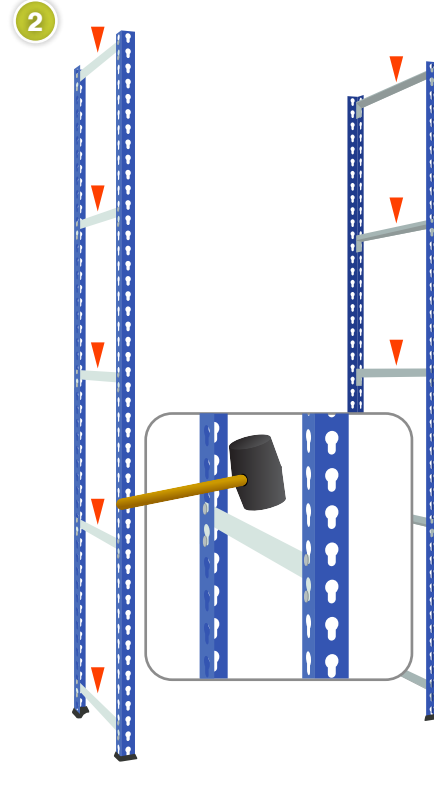

Attach side beams to the uprights at desired heights and secure with a rubber mallet.

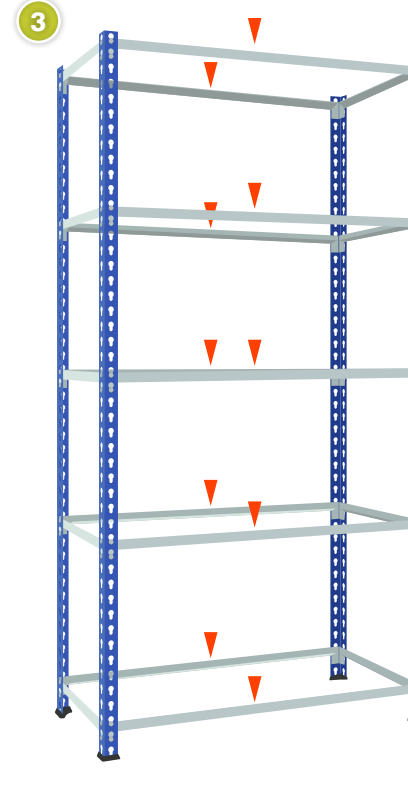

Attach front and back beams to the frames at the same level as the side beams and secure with a rubber mallet.

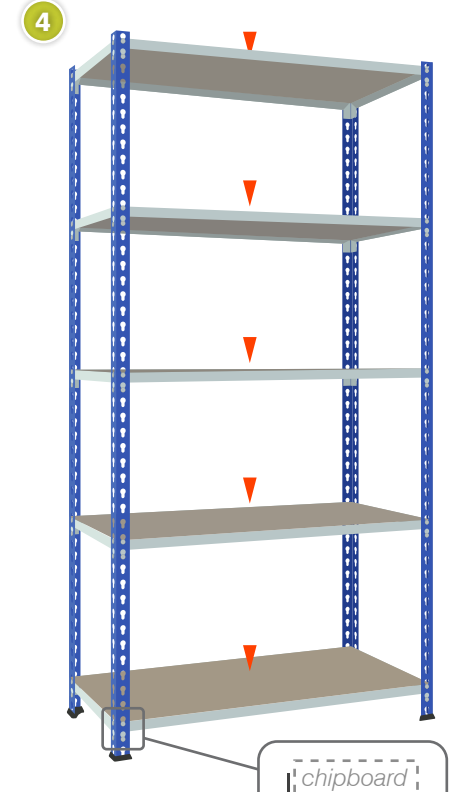

Place chipboard into the levels.

## J RIVET Loads and Capacities

Shelf Pitch	Bay Load	Shelf Width	Load
305mm	2500kgs	915mm	150kgs
457mm	2400kgs	1220mm	120kgs
610mm	2300kgs		
762mm	2200kgs		
915mm	2040kgs		
1066mm	1880kgs		
1220mm	1800kgs		

\*Shelf Pitch - distance between shelf levels

\*Bay Load - based on 5 levels with the 1st level at the base

### Tools Required

Rubber Mallet

### Safety Precaution

Two competent people wearing safety gloves, safety shoes and protective eyewear are recommended to undertake the assembly.



scan for more info